

2012

Micro ATX

Industrial Motherboard

NMF93-Q77


Based on Intel® Q77 Panther Point Platform for Ivy Bridge




Jetway Computer Corporation
Phone: 510-857-0130 Fax: 510-857-0138
38507 Cherry St., Ste E, Newark, CA 94560



NMF93-Q77 Micro ATX Industrial Motherboard

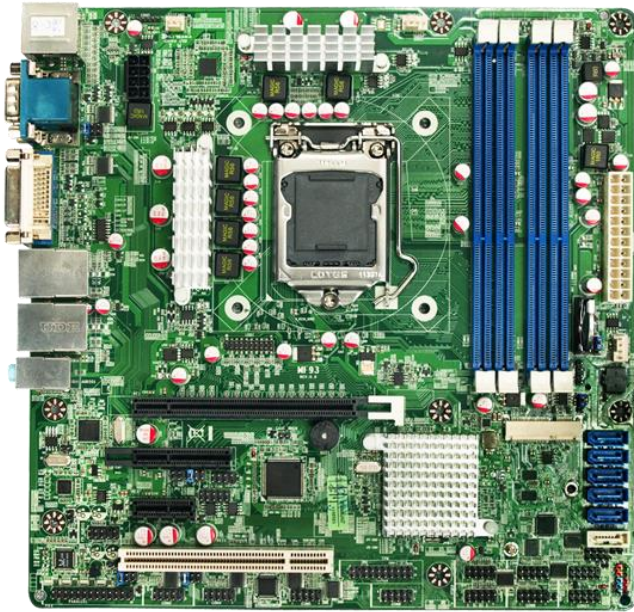

1. EOL Announced, LAST BUY DUE 8/1/19
2. Socket LGA 1155 for 3rd generation Intel Core i3, i5, i7 Processors (Ivy Bridge)
3. Dual Channel DDR3-1066/1333 up to 32GB
4. Intel 82579LM & 82574L PCI-E Gigabit LAN
5. Intel Active Management Technology (iAMT 8.0)
6. 2 * SATA2 6Gb/s, 4 * SATA2 3Gb/s with RAID
7. 1 * mSATA Slot for Embedded SSD
8. 1 * PCI-E 3.0 x16, 1 * PCI-E x4, 1 * PCI-E x1, 1 * PCI
9. 1 * PCI Express Mini Card Slot (shared with mSATA)
10. 10 * Serial Ports, TPM 1.2 Header, USB 3.0
11. All Solid Polymer Capacitors for Improved Reliability
12. Industrial Embedded Platform with 5-Year Availability
13. Micro ATX Form Factor

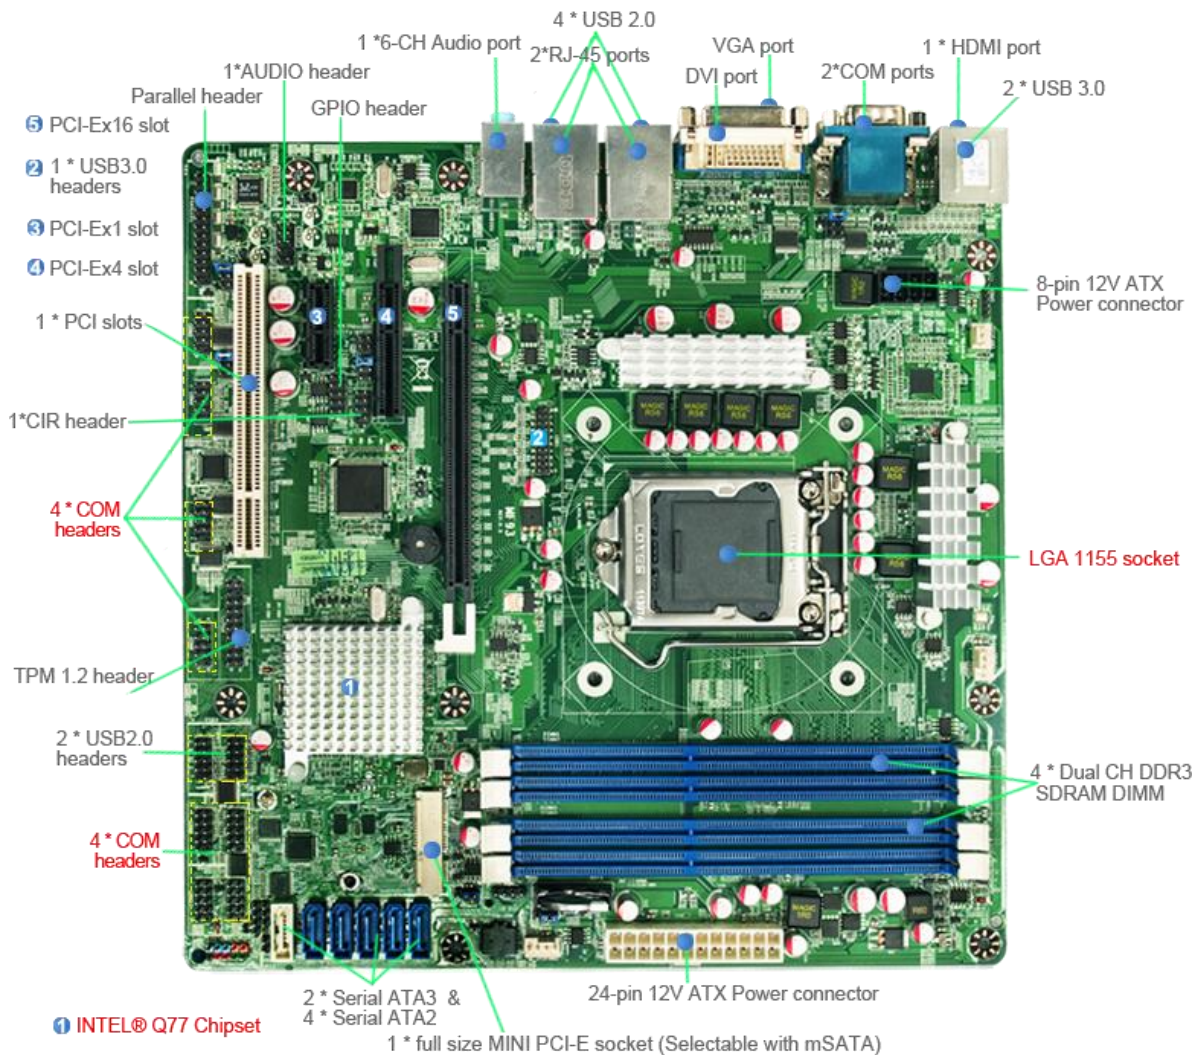

NMF93-Q77 Specifications

Model No:	NMF93
Part No:	JNMF93-Q77
Processor	Socket LGA 1155 for 3 rd generation Intel Core i3, i5, i7 & Pentium processors (Ivy Bridge), Supports Turbo Boost 2.0, 64-bit, Hyper-Threading, Virtualization (VT-d), and Intel HD graphics on selected models*
Chipset	Intel Q77 Express chipset
Video	Intel HD graphics built into processors"
Memory	4 * 240-pin DIMM Sockets for un-buffered dual channel DDR3-1066/1333 up to 32GB
Storage	2 * SATA3 6Gb/s supporting RAID 0, 1 and 4 * SATA2 3Gb/s supporting RAID 0, 1, 5, 10 1 * mSATA 3Gb/s slot for embedded SSD (mini-PCIE/mSATA selectable)
Expansion Slots	1 * PCI Express 3.0 x16, 1 * PCI Express x4, 1 * PCI Express x1, 1 * PCI
LAN	1 * Intel 82579LM PCI-E gigabit LAN 1 * Intel 82574L PCI-E gigabit LAN Intel Active Management Technology (iAMT 8.0)
Audio	Realtek ALC662 6-CH HD Audio
Watchdog	Watchdog system reset timer, 10-255 sec/min
Rear I/O Ports	4 * USB 2.0 ports 2 * USB 3.0 ports 2 * RJ-45 port 1 * HDMI port, 1 * DVI-D port, 1 * VGA port 2 * Serial ports (RS232) 3 * Audio jacks (line-in, line-out, mic)
Internal I/O Ports	2 * USB header for 4 * USB 2.0 ports, 1 * USB header for 2 * USB 3.0 ports 3 * Fan headers,, 1 * CIR header, 1 * 8-bit GPIO 8 * Serial headers (7 * RS232, 1 * RS232/422/485) 1 * Chassis intrusion header, 1 * TPM 1.2 header, 1 * Parallel header, 1 * PS/2 header 1 * 24-pin ATX & 8-pin 12V power connector
BIOS	AMI EFI 64MB SMT Flash ROM
Compliance	CE, FCC, RoHS
Temperature	Operating: 0 – 60° C, Storage: -20 – 85° C
Form Factor	Micro ATX, 244mm x 244mm
Warranty	2 Years limited warranty

Specifications subject to change without notice, not responsible for typographical errors.

When using Sandy Bridge CPU the PCI Express slot operates at PCIE 2.0 x16 speed



Jetway Computer Corporation
Phone: 510-857-0130 Fax: 510-857-0138
8058 Central Ave., Newark, CA 94560
www.jetwaycomputer.com

