
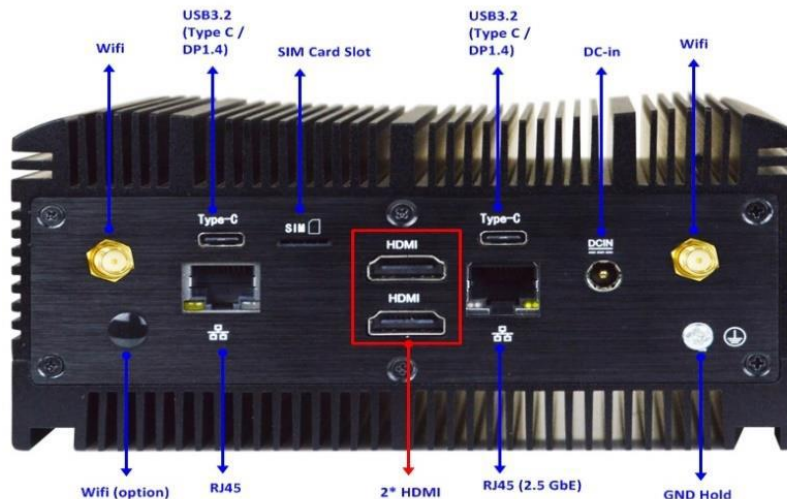


JBC330U10

Fanless 11th Gen Intel i5 Embedded Barebone 1*2.5G+1*GbE / 4*4K@60 / M.2 / 12V-24V

Features

- Fanless Embedded Barebone System with Planned Lifecycle Through Q3'2035
- Fanless 11th Gen Tiger Lake Intel i5 Processor for High Performance with Low Power
- Supports DDR4-3200 up to 64GB Total Memory
- Up to 4 * 4K or 1 * 8K. 2*HDMI, 2*Type-C(DP++)
- 1 *Intel 2.5GbE, 1 * Intel 1GbE, HD Audio
- M.2 SATA/PCIE 4.0 x4 NVME, M.2 2230 (for WIFI)
- M.2 3042/3052 with SIM (for Cellular)
- 5 * USB 3.2 Gen2 (10Gb/s) ports,
- Watchdog Timer, 12-24V DC-In, 90W AC Adapter
- Heavy Duty Operating Temperature -10C to 50C
- Includes Wall and VESA Mounts

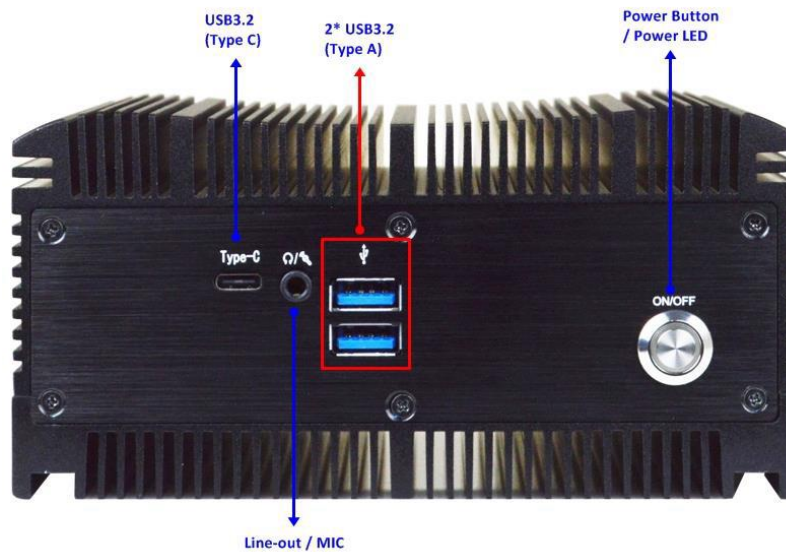

Model	<ul style="list-style-type: none"> ■ JBC330U10
Part No	<ul style="list-style-type: none"> ■ HBJC330U10-45G7-B ■ HBJC330U10I-45G7-B (WIFI)
Processor	<ul style="list-style-type: none"> ■ Fanless 11th Gen Intel i5-11145G7E Tiger Lake-UP3 15W SoC processor, VPRO, Iris Xe graphics
Memory	<ul style="list-style-type: none"> ■ 2 * 260-pin DDR4-3200 SO-DIMM up to 64GB total memory
Storage	<ul style="list-style-type: none"> ■ 1 * M.2 M-key SATA/PCIE 4.0 x4 NVME 2242/2280
Network	<ul style="list-style-type: none"> ■ 1 * Intel i219-LM gigabit LAN (iAMT) ■ 1 * Intel i225-V 2.5GbE ■ WIFI Model: includes AC-WIFI + BT5.0 ■ Non-WIFI Model: open M.2 2230 E-key slot for WIFI (CNVI/USB/PCIE) ■ M.2 B-key 3042/3052 with SIM slot (for cellular)
Other Features	<ul style="list-style-type: none"> ■ Watchdog Timer 10-255 min/sec., AT/ATX Power Mode, HD Audio
Front Panel I/O	<ul style="list-style-type: none"> ■ Power button with LED ■ 2 * USB 3.2 Gen2 (10Gb/s) ports Type-A ■ 1 * USB 3.2 Gen2 (10Gb/s) ports Type-C(USB only) ■ 3.5mm Line-out/Mic-in combo jack
Rear Panel I/O	<ul style="list-style-type: none"> ■ 2 * USB 3.2 Gen2 (10Gb/s) ports Type-C(DP++) ■ 2 * RJ45 ■ 2 * HDMI 2.0b 4K @60Hz ■ SIM Card slot ■ 12V - 24V DC-in jack, Antenna holes
BIOS	<ul style="list-style-type: none"> ■ AMI Flash ROM UEFI BIOS with Intel fTPM (PTT)
Box Contents	<ul style="list-style-type: none"> ■ 90W 12V AC Adapter, US Power Cord, Wall/VESA Mount, Antenna (WIFI model)
Compliance	<ul style="list-style-type: none"> ■ CE, FCC, RoHS, ErP Ready
Temperature	<ul style="list-style-type: none"> ■ Operating Temperature -10 - 50° C ■ Storage Temperature -40 - 85° C
Dimensions	<ul style="list-style-type: none"> ■ 150 x 106 x 75mm (DxWxH)
Warranty	<ul style="list-style-type: none"> ■ 2 Year limited warranty

*Specifications subject to change without notice, not responsible for typographical errors. Does not include memory, HDD, optical, or OS.



Jetway Computer Corporation
Phone: 510-857-0130 Fax: 510-857-0138
8058 Central Ave., Newark, CA 94560
www.jetwaycomputer.com

