



JBC330U95V

Fanless 10th Gen Intel i5 Barebone
2 Intel GbE / 3*Displays / M.2 / 12V-24V



Features

- Fanless Barebone System
- Fanless 10th Gen Intel i5 Processors for High Performance with Low Power
- Supports DDR4-2666 up to 64GB Total Memory
- Up to 3 * 4K Displays, 2*HDMI, 1*Displayport
- 1 * Intel 2.5GbE, 1 * Intel 1GbE, HD Audio
- M.2 SATA 2242, M.2 2230 (for WIFI)
- 4 * USB 3.2 Gen2 (10Gb/s) ports, Serial Port
- Watchdog Timer, 12-24V DC-In, 60W AC Adapter
- Heavy Duty Operating Temperature -10C to 50C
- Includes Wall and VESA Mounts

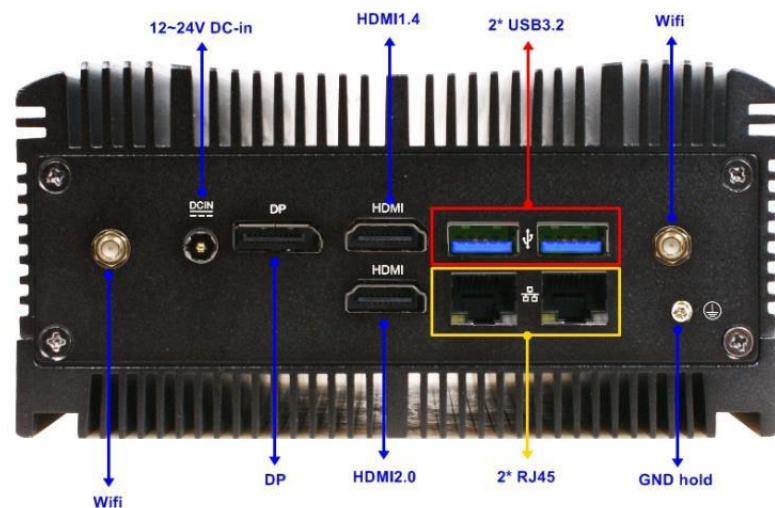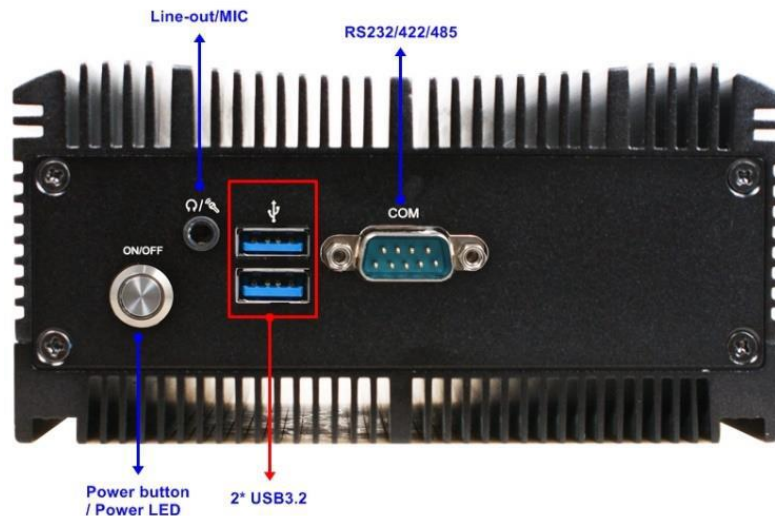

| | |
|------------------------|--|
| Model | <ul style="list-style-type: none"> ■ JBC330U95V |
| Part No | <ul style="list-style-type: none"> ■ HBJC330U95V-10210 ■ HBJC330U95VI-10210 (WIFI) |
| Processor | <ul style="list-style-type: none"> ■ Fanless 10th Gen Intel i5-10210U Comet Lake-U 15W SoC processor |
| Memory | <ul style="list-style-type: none"> ■ 2 * 260-pin DDR4-2666 SO-DIMM up to 64GB total memory |
| Storage | <ul style="list-style-type: none"> ■ 1 * M.2 SATA M-key 2242 |
| Network | <ul style="list-style-type: none"> ■ 1 * Intel i219-LM gigabit LAN (iAMT) ■ 1 * Intel i211-AT gigabit LAN ■ WIFI Model: includes Intel 9260 M.2 WIFI card (non-vPro) ■ Non-WIFI Model: open M.2 2230 E-key slot for WIFI (CNVI/USB/PCIE) |
| Other Features | <ul style="list-style-type: none"> ■ Watchdog Timer 10-255 min/sec., AT/ATX Power Mode, HD Audio |
| Front Panel I/O | <ul style="list-style-type: none"> ■ Power button with LED ■ 2 * USB 3.2 Gen2 (10Gb/s) ports ■ 3.5mm Line-out/Mic-in combo jack ■ 1 * Serial port (RS232/422/485) |
| Rear Panel I/O | <ul style="list-style-type: none"> ■ 2 * USB 3.2 Gen2 (10Gb/s) ports ■ 2 * RJ45 ■ 1 * HDMI 2.0 4K @60Hz ■ 1 * HDMI 1.4b 4K @24Hz ■ 1 * Displayport 4K @60Hz (video only) ■ 12V-24V DC-in jack, Antenna holes |
| BIOS | <ul style="list-style-type: none"> ■ AMI Flash ROM |
| Box Contents | <ul style="list-style-type: none"> ■ 60W 12V AC Adapter, US Power Cord, Wall/VESA Mount, Antenna (WIFI model) |
| Compliance | <ul style="list-style-type: none"> ■ CE, FCC, RoHS, ErP Ready |
| Temperature | <ul style="list-style-type: none"> ■ Operating Temperature -10~50 ° C ■ Storage Temperature -20-60 ° C |
| Dimensions | <ul style="list-style-type: none"> ■ 150 x 106 x 75mm (DxWxH) |
| Warranty | <ul style="list-style-type: none"> ■ 2 Year limited warranty |

*Specifications subject to change without notice, not responsible for typographical errors. Does not include memory, HDD, optical, or OS.



Jetway Computer Corporation
Phone: 510-857-0130 Fax: 510-857-0138
8058 Central Ave., Newark, CA 94560
www.jetwaycomputer.com

