


# JBC511I09

## Thin Mini-ITX Fanless Barebone LGA1200 up to 35W / HDMI/DP / 12-28V



### Features

- Fanless Barebone System. The H470 chipset is non-embedded. Aluminum Enclosure
- Supporting 10<sup>th</sup>/11<sup>th</sup> Gen Intel Processors up to 35W
- Supports DDR4-2933 SODIMM up to 64GB Total
- Up to 2 Displays, HDMI, Displayport
- 1 \* 2.5" SATA Bay, M.2 SATA/PCIE 3.0 x4 NVME
- M.2 2230 (for WIFI), Intel Gigabit LAN
- 1 \* Serial Port (RS232/422/485)
- Dimensions: 38 x 199.4 x 264mm

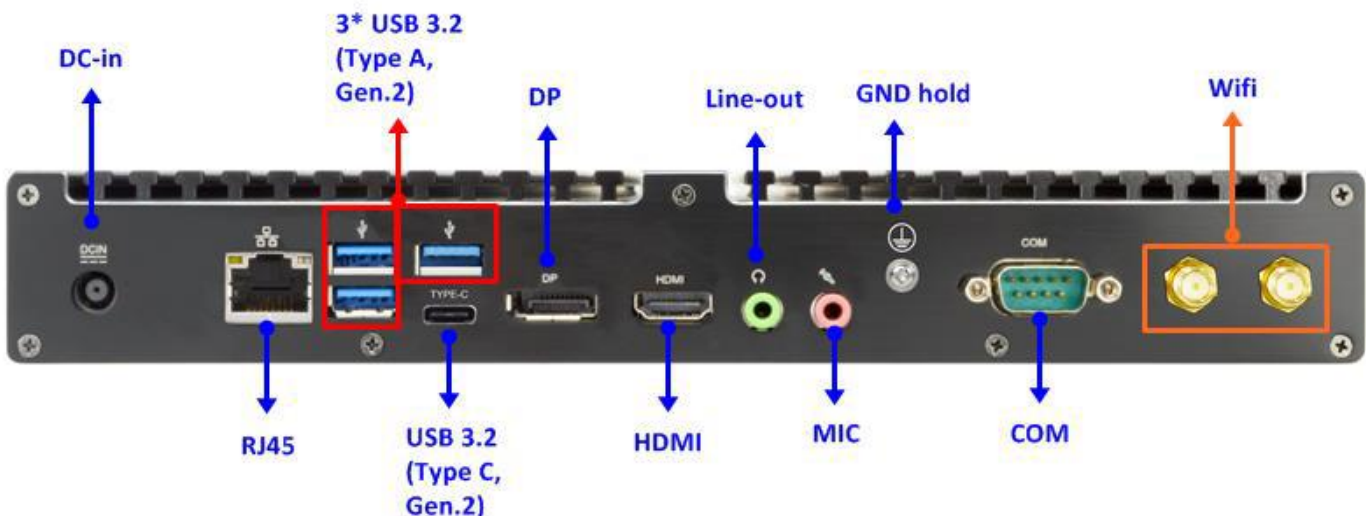

<b>Model</b>	<ul style="list-style-type: none"> <li>■ JBC511I09</li> </ul>
<b>Part No</b>	<ul style="list-style-type: none"> <li>■ HBJC511I09-H470-B (no WIFI)</li> <li>■ HBJC511I09I-H470-B (AC WIFI)</li> <li>■ HBJC511I09-H470-T (no WIFI, TPM 2.0)</li> <li>■ HBJC511I09I-H470-T (AC WIFI, TPM 2.0)</li> </ul>
<b>Processor</b>	<ul style="list-style-type: none"> <li>■ Socket LGA1200, Supports 10th/11th Generation Intel processors, Comet Lake, Up to 35W</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>■ 2 * 260-pin SO-DIMM slots supporting dual channel DDR4-2933 up to 64GB total</li> </ul>
<b>Storage</b>	<ul style="list-style-type: none"> <li>■ 1 * 2.5" SATA3 6Gb/s bay (supports RAID 0/1 when using SATA + M.2 SATA)</li> <li>■ 1 * M.2 M-key 2242/2260/2280 SATA &amp; PCIE 3.0 x4 NVME</li> </ul>
<b>Network</b>	<ul style="list-style-type: none"> <li>■ 1 * Intel i219-V Gigabit LAN</li> <li>■ 1 * M.2 E-key 2230 (USB/PCIE/CNVI) (AC-WIFI installed on WIFI model)</li> </ul>
<b>Other Features</b>	<ul style="list-style-type: none"> <li>■ HD Audio, AHCI, Watchdog Timer 10-255 min/sec. Optional TPM 2.0</li> </ul>
<b>Rear Panel I/O</b>	<ul style="list-style-type: none"> <li>■ 3 * USB 3.2 Gen2 ports, 1 * USB 3.2 Gen1 port</li> <li>■ 1 * HDMI 4K @30Hz, 1 * Displayport 4K @60Hz</li> <li>■ 1 * RJ45 ports, Line-out, Mic</li> <li>■ 1 * Serial port (RS242/422/485), 2 * Antenna holes</li> <li>■ 12V - 19V DC-In barrel jack (1-pin, 5.1mm ID/7.4mm OD)</li> </ul>
<b>Front Panel I/O</b>	<ul style="list-style-type: none"> <li>■ Power/Reset, Line-out, Mic</li> <li>■ 4 * USB 2.0 ports</li> </ul>
<b>BIOS</b>	<ul style="list-style-type: none"> <li>■ AMI UEFI Flash ROM</li> </ul>
<b>Box Contents</b>	<ul style="list-style-type: none"> <li>■ 120W 19V AC Adapter, US Power Cord, Wall mount, VESA mount, (2 *Antenna WIFI model)</li> </ul>
<b>Compliance</b>	<ul style="list-style-type: none"> <li>■ CE, CE-LVD, FCC, RoHS, ErP Ready</li> </ul>
<b>Temperature</b>	<ul style="list-style-type: none"> <li>■ Operating Temperature 0~50 ° C</li> <li>■ Storage Temperature -10-70 ° C</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>■ 199.4 x 264 x 38mm (DxWxH)</li> </ul>
<b>OS Support</b>	<ul style="list-style-type: none"> <li>■ Windows 10/11 64bit, Linux UEFI</li> </ul>
<b>Warranty</b>	<ul style="list-style-type: none"> <li>■ 2 Years limited warranty</li> </ul>

\*Specifications subject to change without notice, not responsible for typographical errors. Does not include CPU, Memory, Storage or OS.



**Jetway Computer Corporation**  
**Phone: 510-857-0130 Fax: 510-857-0138**  
**8058 Central Ave., Newark, CA 94560**  
**www.jetwaycomputer.com**

