



JBC385F551

Intel i5-6300U Fanless Embedded Barebone 6 Intel LAN / 2 DP / Console / 12V DC-in



Features

- Fanless & Cableless Networking Embedded Barebone System with Planned Lifecycle Through Q3'2030
- Intel Core i5-7300U Dual-core 15W Processor
- Supports up to 32GB DDR4-2133 Total Memory
- 6 *Intel Gigabit LAN, Supports iAMT & vPro
- 2 * DisplayPort Supporting 4K (4096 x 2304 @60Hz)
- 1 * Cableless 2.5" SATA Storage Bay
- 1 * mSATA/Mini-PCIE Shared Slot
- 1 * Mini-PCIE Slot (or WIFI), SIM Card Holder
- RJ45 Serial Port, 8bits GPIO, 2 * USB 2.0, 2 * USB 3.0
- Watchdog Timer, 12V DC-In Locking Jack
- Includes Wall and Din Rail Mounts

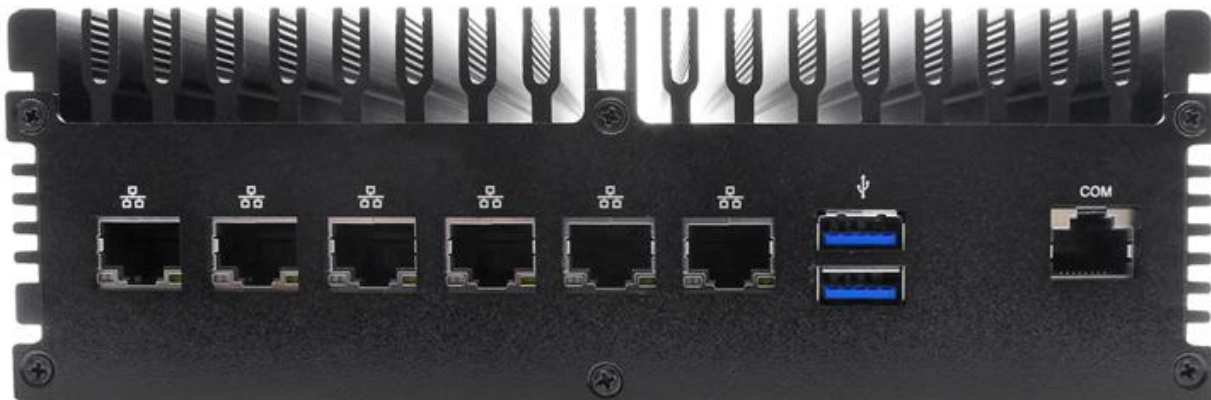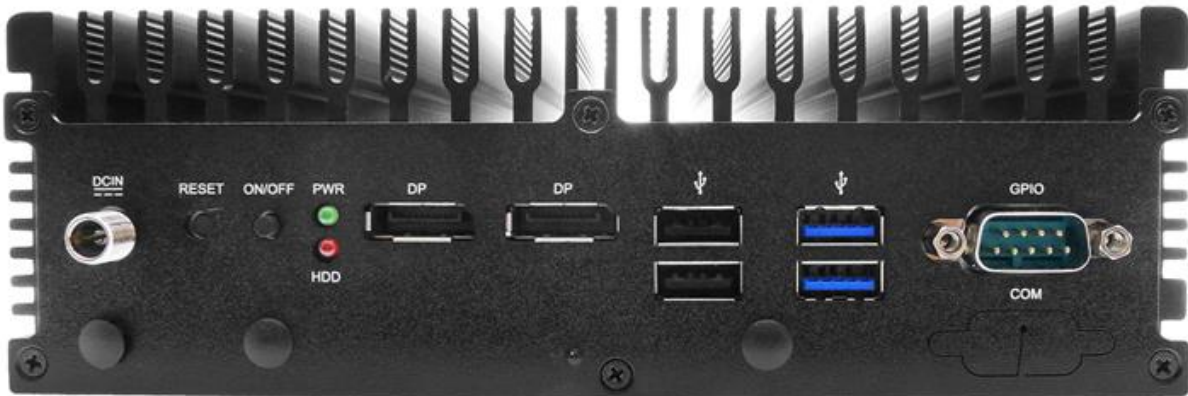

| | |
|------------------------|--|
| Model | <ul style="list-style-type: none"> ■ JBC385F551 |
| Part No | <ul style="list-style-type: none"> ■ HBJC385F551-73U-B (no WIFI) ■ HBJC385F551W-73U-B (with WIFI 802.11 b/g/n) |
| Processor | <ul style="list-style-type: none"> ■ Fanless Intel Core i5-7300U, 2.6GHz, 3.5GHz Burst, Dual-core, Hyper-Threading , Kaby Lake-U, vPro, AES-NI, Virtualization, 14nm, 15W |
| Memory | <ul style="list-style-type: none"> ■ 2 * 260-pin DDR4-2133 SO-DIMM up to 32GB total memory |
| Storage | <ul style="list-style-type: none"> ■ 1 * Cableless 2.5" internal bay for SATA3 6Gb/s HDD/SSD ■ 1 * Full-size mSATA/mini-PCIE shared slot |
| Network | <ul style="list-style-type: none"> ■ 1 * Intel i219-LM (iAMT), 1 * Intel i211-AT, 4-ports Intel i350-AM4 gigabit LAN ■ WIFI Model: 802.11 b/g/n + BT 4.0, SIM card holder ■ Non-WIFI Model: 1 * Mini-PCIE slot (full-size), SIM card holder |
| Other Features | <ul style="list-style-type: none"> ■ AHCI, Watchdog Timer 10-255 min/sec., AT/ATX Power Mode, Intel TPM 2.0 Trusted Computing |
| Front Panel I/O | <ul style="list-style-type: none"> ■ Power & reset buttons, 2 * USB 3.0 ports, 2 * USB 2.0 ports, 2 * DisplayPort (4K @60Hz), 8bits GPIO, Antenna holes, 12V DC-In locking jack |
| Rear Panel I/O | <ul style="list-style-type: none"> ■ 2 * USB 3.0 ports, 6 * RJ45 LAN, 1 * RJ45 Console port (RS232) |
| BIOS | <ul style="list-style-type: none"> ■ AMI 128Mb Flash ROM |
| Box Contents | <ul style="list-style-type: none"> ■ 60W 12V AC Adapter, US Power Cord, Manual, Drivers, Wall/DIN Mount, Antenna (WIFI model) |
| Compliance | <ul style="list-style-type: none"> ■ CE, FCC, RoHS, ErP Ready |
| Temperature | <ul style="list-style-type: none"> ■ Operating Temperature 0~40 ° C ■ Storage Temperature -20-85 ° C |
| Dimensions | <ul style="list-style-type: none"> ■ 142 x 185 x 60mm (DxWxH) |
| OS Support | <ul style="list-style-type: none"> ■ Win 7, Win 8.1, Win 10, Linux, pfSense |
| Warranty | <ul style="list-style-type: none"> ■ 2 Years limited warranty |

*Specifications subject to change without notice, not responsible for typographical errors. Does not include memory, HDD, optical, or OS.



Jetway Computer Corporation
Phone: 510-857-0130 Fax: 510-857-0138
8058 Central Ave., Newark, CA 94560
www.jetwaycomputer.com

